


VG



PROVEN QUALITY LEADING TECHNOLOGY

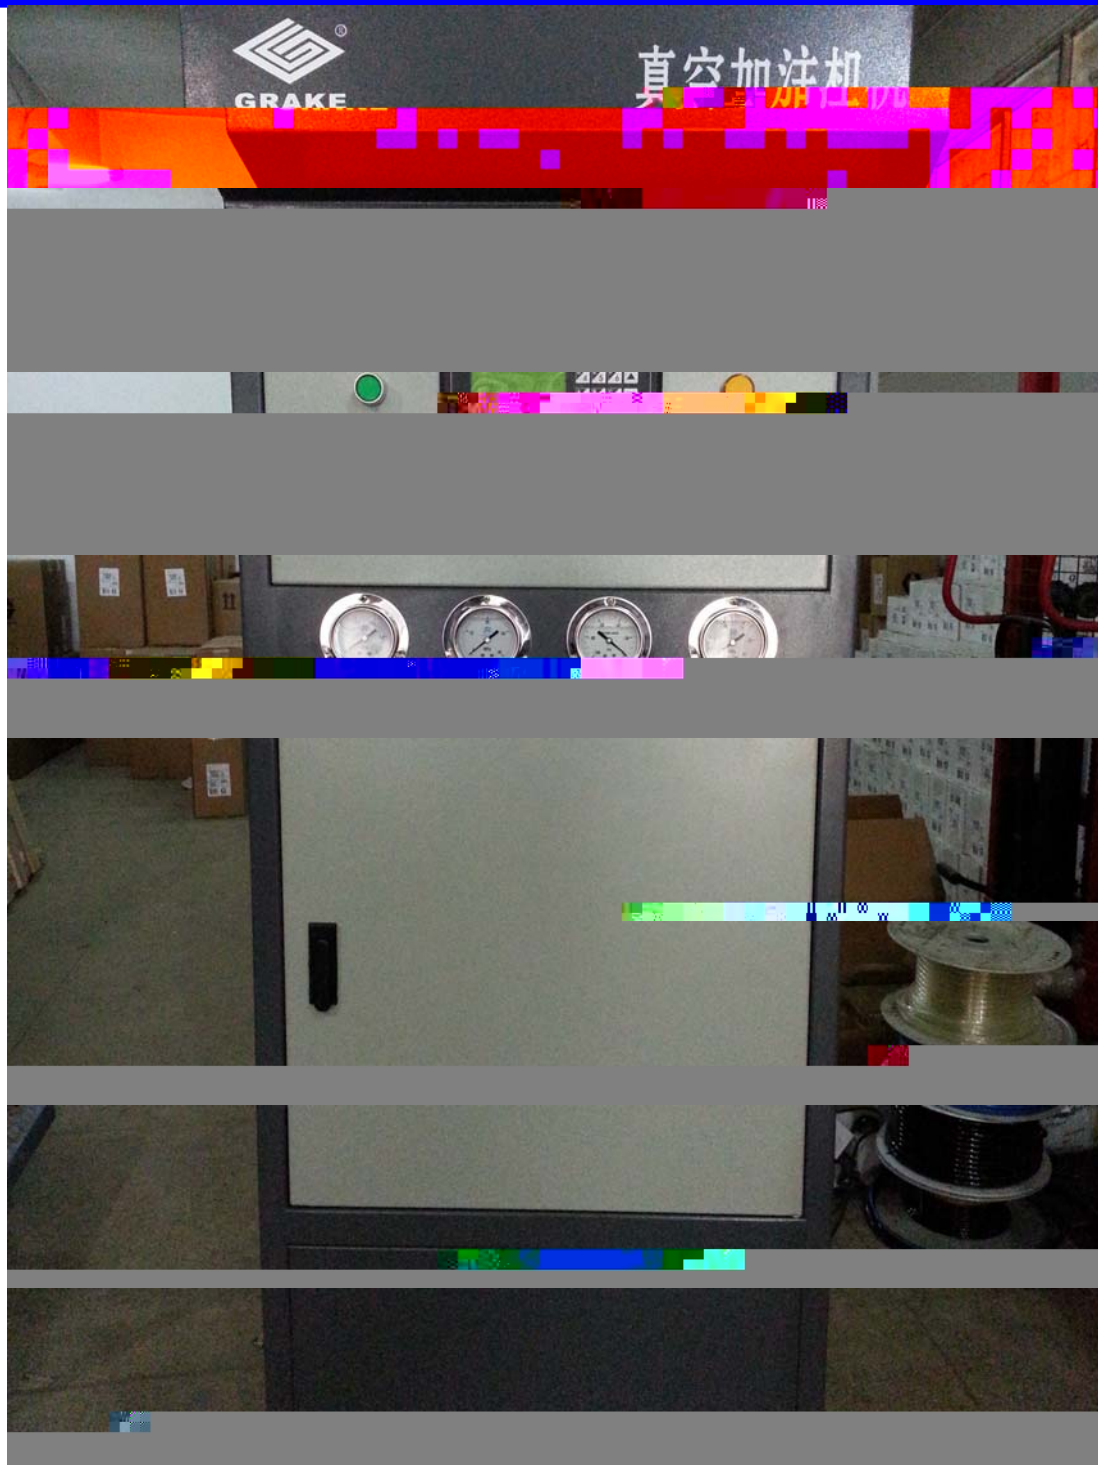

PLC

6



- * 0.1 - 200 ml
- * ± 1% ± 0.1%
- * 6
- *
- *
- *
- *

400 bar

2.6 L/Min

9.7 bar


1 p/Min

0.5 mbar


70 m³/h

220V/380V


10 A

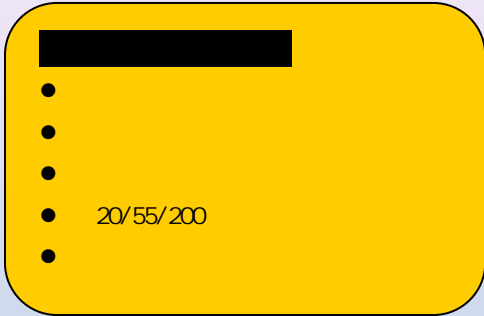

	2.6 kg/Min
	580 bar
	1.85 m ³ /Min
	9.7 bar
	-40 °C ~60°C

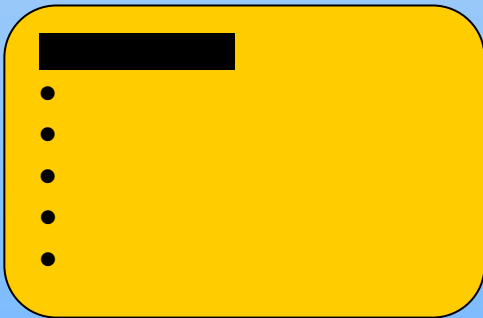

	70 m ³ /h
	0.5 mbar
	2.2 kw
	66 db
mm	221.5*151.1*165.5


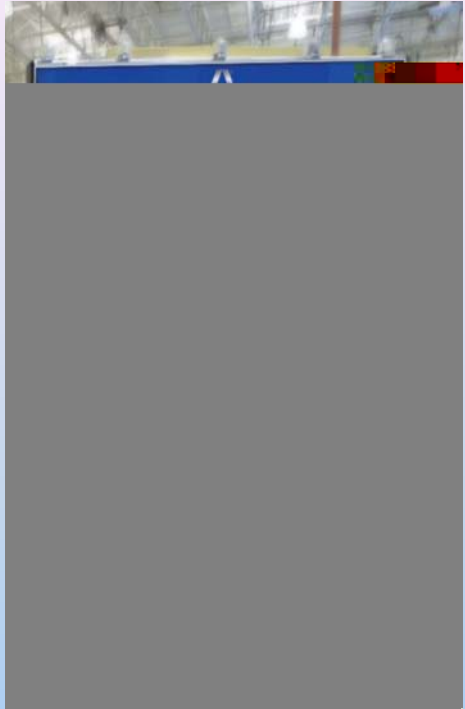


PLC

(6)



PLC	
	220/380V
	1.2A
	2.3 kg
	Buna-N,EPDM
	-40 °C ~60°C

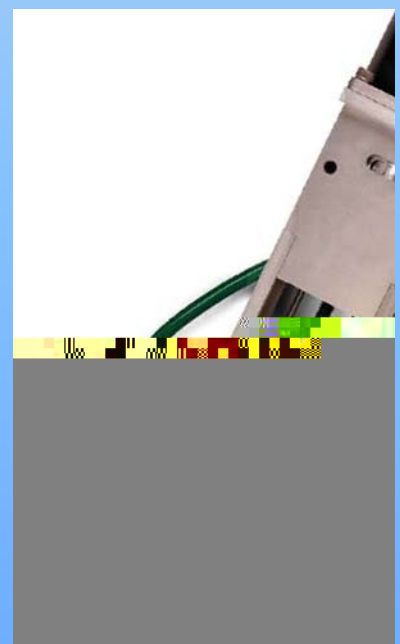

	400 bar
	7 bar
	0.4-70 bar
	200 ml
	± 1%

: GPZ332
, 3 , 200 , 2 6 / ,

				L	L/
G	P	Z	1 1	20 1	0 9 1
O	H	S	3 2	55 2	2 6 2
			5 3	200 3	

